



PyQB

Monga

Iterators and  
generators

Exception  
handling

# Programming in Python<sup>1</sup>

Mattia Monga

Dip. di Informatica  
Università degli Studi di Milano, Italia

`mattia.monga@unimi.it`

Academic year 2024/25, I semester



PyQB

Monga

Iterators and  
generators

Exception  
handling

## Lecture XXI: More pandas



Data can be **grouped** with `groupby`, then *summary* function (`sum`, `mean`, ...) can be applied to **each** group at the same time.

```
iris = pd.read_csv('https://tinyurl.com/iris-data')
```

```
iris.groupby('variety').mean()
```

Groups are special **lazy** types which generate data only when needed for the summary operation.



Object can be **iterable**. Python defines the iterator protocol as:

- `iterator.__iter__()` Return the iterator object itself. This is required to allow both containers and iterators to be used with the `for` and `in` statements.
- `iterator.__next__()` Return the next item from the container. If there are no further items, raise the `StopIteration` exception.



PyQB

Monga

Iterators and  
generators

Exception  
handling

Built-in lists, tuples, ranges, sets, dicts are iterators.

- Numpy arrays
- Pandas Series and DataFrames



# Generators

```
def mygenerator() -> int:  
    for i in [1, 6, 70, 2]:  
        yield i  
    print('Ended') # Just to see when it reaches this  
    ↪ point
```

```
g = mygenerator()
```

```
print(g) # not useful  
print(next(g))  
print(next(g))  
print(next(g))  
print(next(g))  
print(next(g)) # Exception
```

PyQB

Monga

Iterators and  
generators

Exception  
handling



PyQB

Monga

Iterators and  
generators

Exception  
handling

Be careful: the default iteration is on **column names** (similar to dicts, which iterate on keys).

- `iterrows()`: Iterate over the rows of a DataFrame as (index, Series) pairs. This converts the rows to Series objects, which can change the dtypes and has some performance implications.
- `itertuples()`: Iterate over the rows of a DataFrame as namedtuples of the values. This is a lot faster than `iterrows()`, and is in most cases preferable to use to iterate over the values of a DataFrame.

Iterating is **slow**: whenever possible try to use vectorized operation or **function application**.

# Pandas function application



PyQB

Monga

Iterators and  
generators

Exception  
handling

```
# apply the function to each column  
df.apply(lambda col: col.mean() + 3)
```

```
# apply the function to each row  
df.apply(lambda row: row + 3, axis=1)
```





PyQB

Monga

Iterators and  
generators

Exception  
handling

```
df[df['A A'] > 3]
```

```
# equivalent to this (backticks because of the space)
```

```
df.query('`A A` > 3')
```

```
# query can also refer to the index
```

```
df.query('index >= 15')
```

```
# same as
```

```
df[15:]
```



PyQB

Monga

Iterators and  
generators

Exception  
handling


## Lecture XXII: Exception handling

# Exceptions



PyQB

- Exceptions and Errors are object **raised** (or thrown) in the middle of an anomalous computation.
- Exceptions change the control flow: the control passes to the “closer” **handler**, if it exists: otherwise it **aborts**.

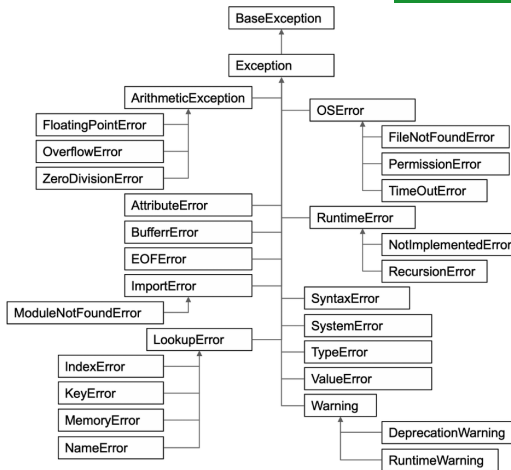

# Exception handling



PyQB

Monga

Iterators and  
generators

Exception  
handling

Exceptions can be **handled**: the strategy is normally an “organized panic” in which the programmer tidies up the environment and exits.

```
danger()  
# An exception in danger  
# aborts the program
```

```
try:  
    danger()  
except:  
    # An exception in danger  
    # it's handled here
```

```
try:  
    danger()  
except OverflowError as e:  
    # An exception in danger  
    # it's handled here  
    # The object is referred by  
    ↪ e  
finally:  
    # This is executed in any  
    ↪ case
```

# Raising an exception



PyQB

Monga

Iterators and  
generators

Exception  
handling

To explicitly raise an exception, use the `raise` statement

```
if something == WRONG:  
    raise ValueError(f'The value {something} is wrong!')
```

Assertions are a disciplined way to raise exceptions.